
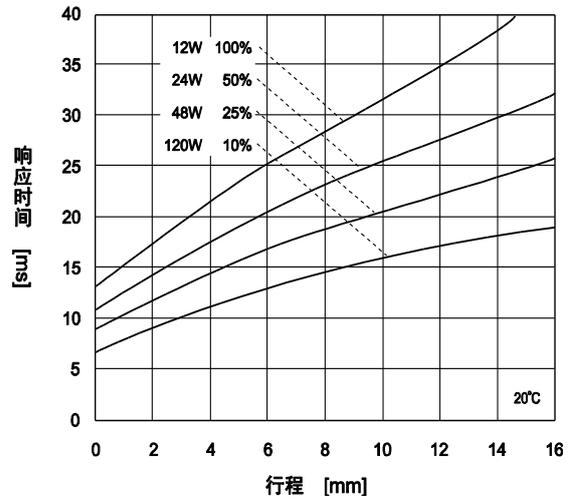
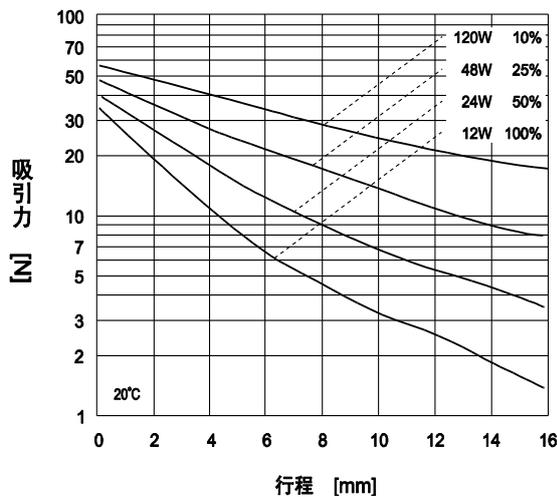


GSD 30/57 管式电磁铁

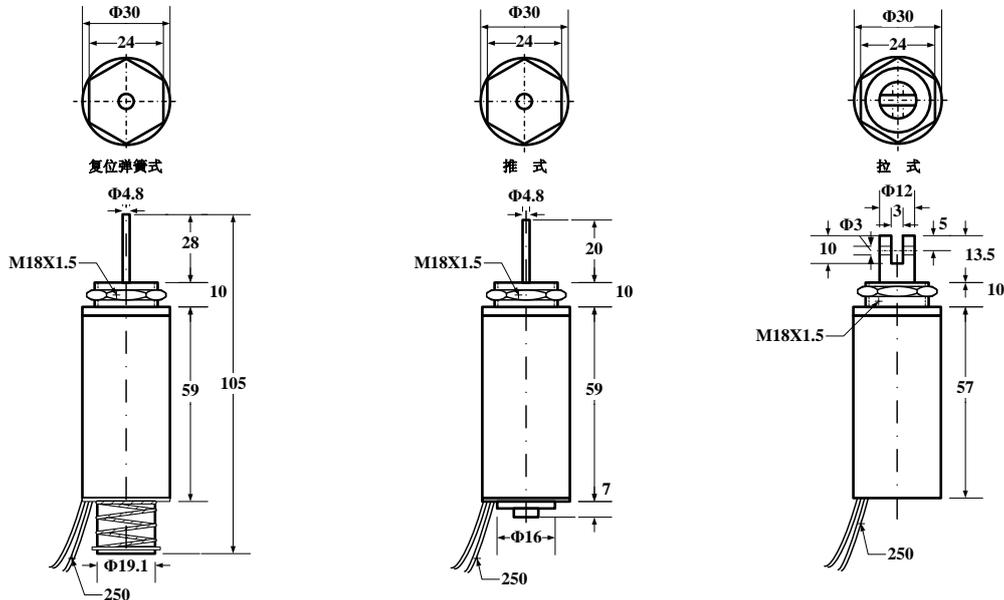

主要技术参数

散热片: 130x130x3mm 铝

负载因数=通电时间/(通电时间+断电时间)	100%连续	50%	25%	10%
		间断		
最长通电时间 (S)	∞	390	50	16
电功率 (W)	12	24	48	120
安培匝数 (20°C)	1300	1850	2610	4120
电阻Ω ±10% (20°C)	工作电压 V · DC			
3	6	8.5	12	19
6.8	9	13	18	28
12	12	17	24	38
19	15	21	30	47
27	18	25	36	57
48	24	34	48	76
75	30	42	60	95
108	36	51	72	114
192	48	68	96	152
300	60	85	120	190