

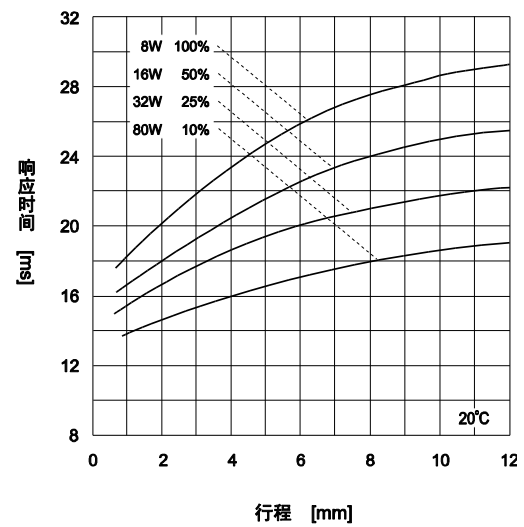


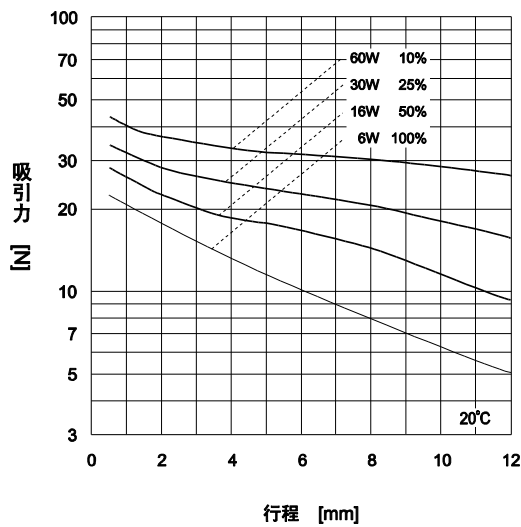

KSD32-55 框架式电磁铁

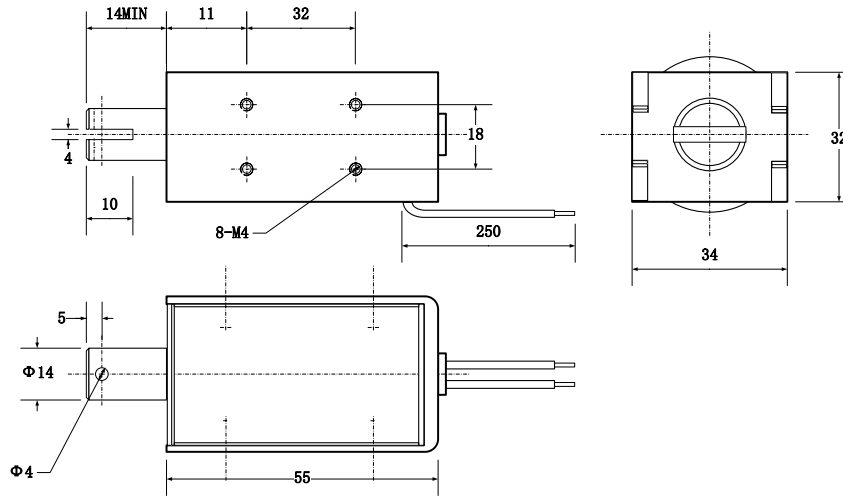

主要技术参数

未装散热片

负载因数= $\frac{\text{通电时间}}{\text{通电时间}+\text{断电时间}} \times 100\%$	100%	50%	25%	10%
	连续	间 断		
最长通电时间 (S)	∞	100	36	7
电功率 (W)	8	16	32	80
安培匝数 (20°C)	975	1380	1950	3080
电 阻Ω ±10% (20°C)	工作电压 V · DC			
4.6	6	8.5	12	19
10	9	13	18	28
18	12	17	24	38
28	15	21	30	47
41	18	25	36	57
72	24	34	48	76
110	30	42	60	95
164	36	51	72	114
220	42	59	84	133
288	48	68	96	152