
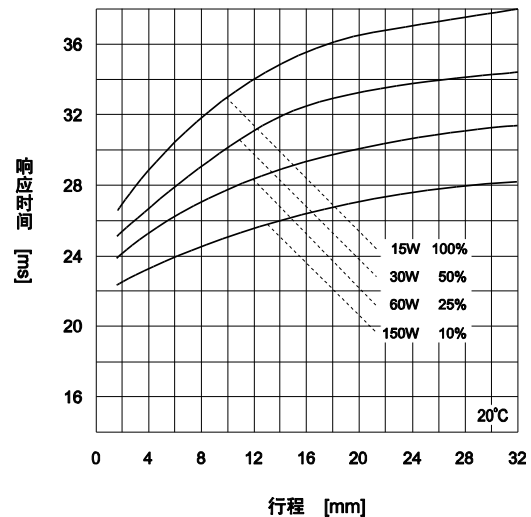
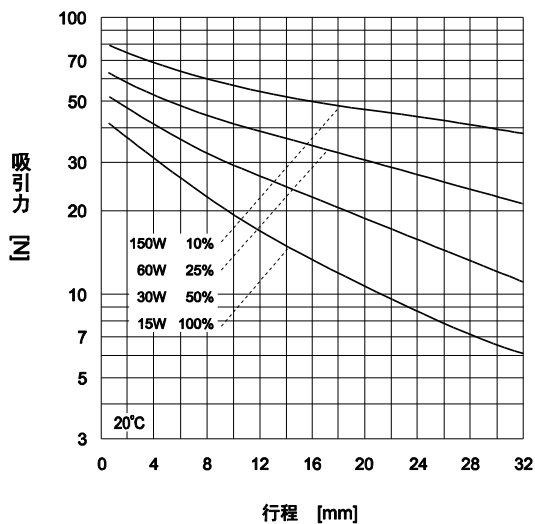


KSD52-86 框架式电磁铁

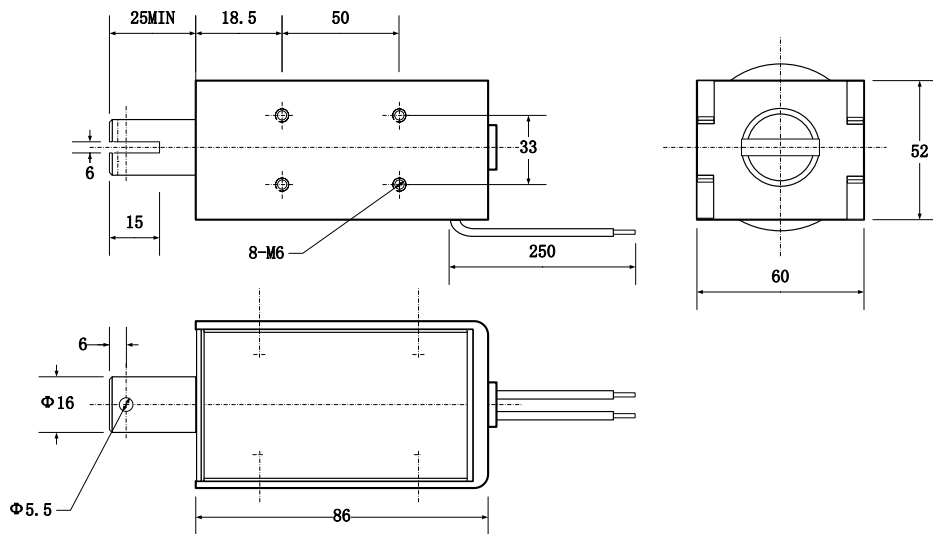

主要技术参数

未装散热片

负载因数 = $\frac{\text{通电时间}}{\text{通电时间} + \text{断电时间}} \times 100\%$	100%	50%	25%	10%
	连续	间断		
最长通电时间 (S)	∞	300	150	45
电功率 (W)	15	30	60	150
安培匝数 (20°C)	2170	3060	4352	6860
电阻 $\Omega \pm 10\%$ (20°C)	工作电压 V · DC			
2.4	6	8.5	12	19
5.6	9	13	18	28
9.6	12	17	24	38
15	15	21	30	47
22	18	25	36	57
39	24	34	48	76
60	30	42	60	95
85	36	51	72	114
116	42	59	84	133
155	48	68	96	152