
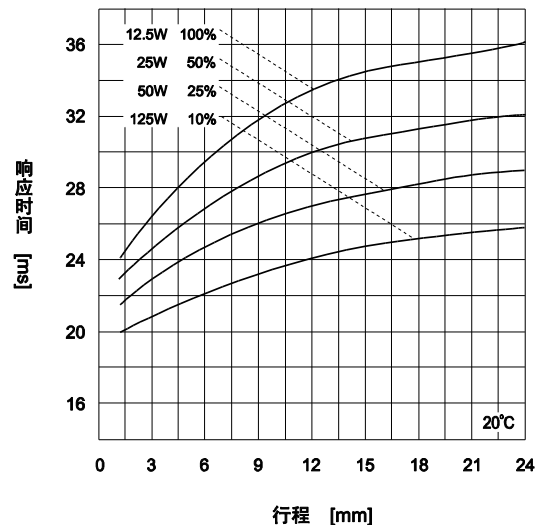
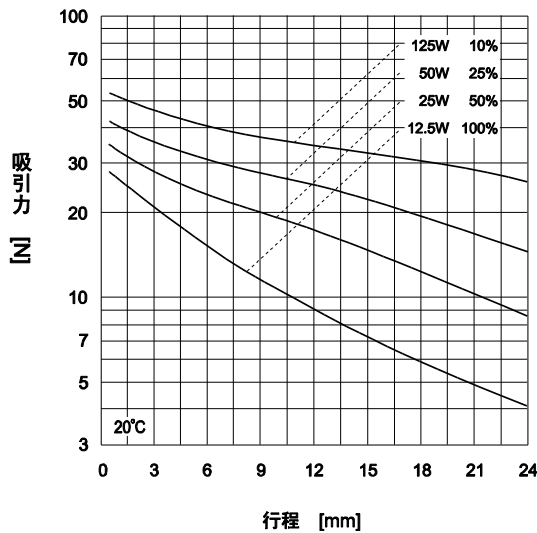


KSD44-74 框架式电磁铁

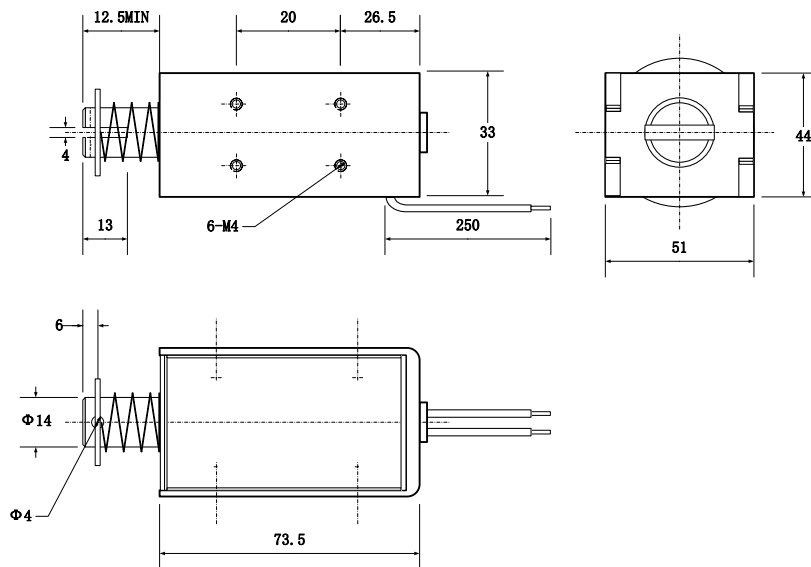

主要技术参数

未装散热片

负载因数= $\frac{\text{通电时间}}{\text{通电时间}+\text{断电时间}} \times 100\%$	100%	50%	25%	10%
	连续	间 断		
最长通电时间 (S)	∞	160	80	32
电功率 (W)	12.5	25	50	125
安培匝数 (20°C)	1920	2730	3860	6100
电 阻 $\Omega \pm 10\%$ (20°C)	工作电压 V · DC			
2.9	6	8.5	12	19
6.5	9	13	18	28
11.5	12	17	24	38
18	15	21	30	47
26	18	25	36	57
46	24	34	48	76
72	30	42	60	95
104	36	51	72	114
141	42	59	84	133
184	48	68	96	152